


CABINETMAKER Door Track System

Australian Patent Applied for PR9454

Sliding Cupboard Doors 20kg Per Door

TT180 - Headguide Channel
Overhead fixing using screws provided

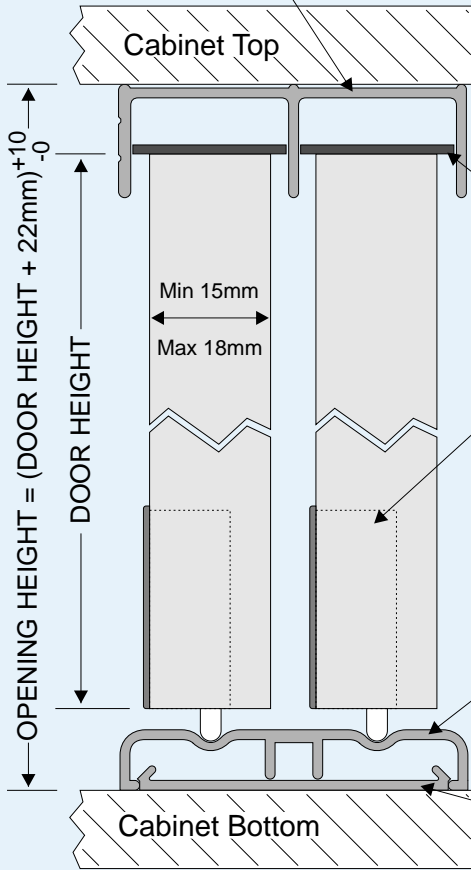

FEATURES:

- *Maximum load - 20kg per door
- *Slimline aluminium extrusions pre-finished in Clear Anodised and Powder Coat White
- *Reversible headguide - grooved face or flush face
- *Bottom track snap-fixes to bottom fixing strip - no unsightly fixings
- *Nylon roller with 10mm height adjustment
- *Suits doors 15 to 18mm thick


TT186 - Door Guide
Fixed into top of door with countersunk screws provided

TT184 - Adjustable Sheave
Fixed to bottom rear of door with countersunk screws provided

TT182 - Double Track
Snap fix to **TT183** Snap Strip

TT183 - Snap Strip
Bottom fixing using screws provided


TRACKS SHOWN ACTUAL SIZE

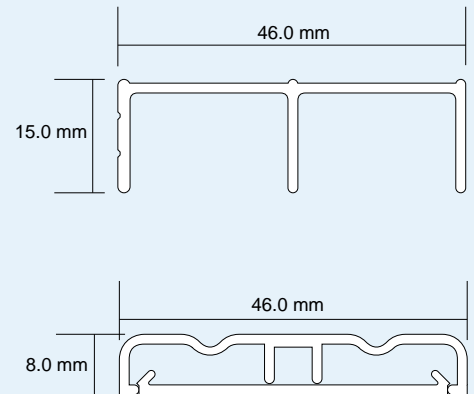

IMPORTANT:

To ensure that the doors run smoothly Cowdroy highly recommend that the snap strip be fixed to a solid, level surface. As an alternative, you may fix the track directly to the bottom surface and disregard the use of the snap strip.

Cut out in door for Roller

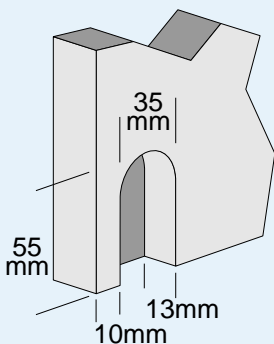


Maximum Door Height = 1200mm

Opening height = Door Height + 22mm (for minimum gap)

Opening width / Track length = No. of doors x door width less the overlaps

e.g. 3 door opening, 600mm W doors with 20mm overlap
= (3 x 600mm) - (2x20mm) = 1760mm

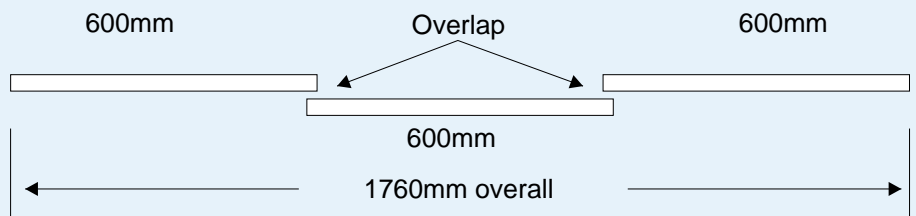

P180	Packaged Set for 2 Doors - 1200 & 1500mm opening
P180	Packaged Set for 3 Doors - 1800mm opening
TT180	Headguide Channel 4850mm - White & Clear Anodised
TT182	Double Track 4850mm - White & Clear Anodised
TT183	Snap Strip 4850mm - Mill Finish
TT184	Adjustable Sheave with Nylon Roller
TT186	Nylon Door Guide

