




# TUDOR Sliding Door Track System

## Cupboard Doors - 20kg Per Door


### FEATURES:

- \*Nylon wheels with lubricated ball bearings - quiet and smooth
- \*Dual wheels on pivoting axle - 20kg per door max.
- \*Height adjustment slot for accurate door alignment
- \*Offset race assembly for varying door thicknesses
- \*Ribbed aluminium track for visual appeal
- \*Zinc plated steel components reduces corrosion
- \*Extruded aluminium tracks
- \*Packaged sets or sold separately

For 2 or more doors in bi-passing applications run the tracks parallel to each other. The door and/or track gap will be determined by the door thickness.

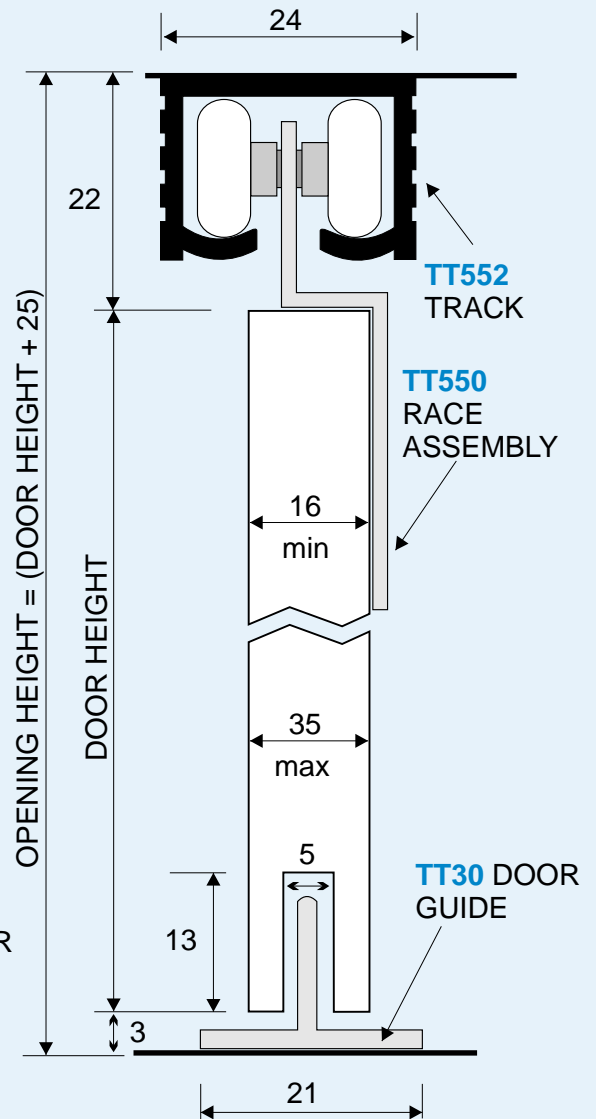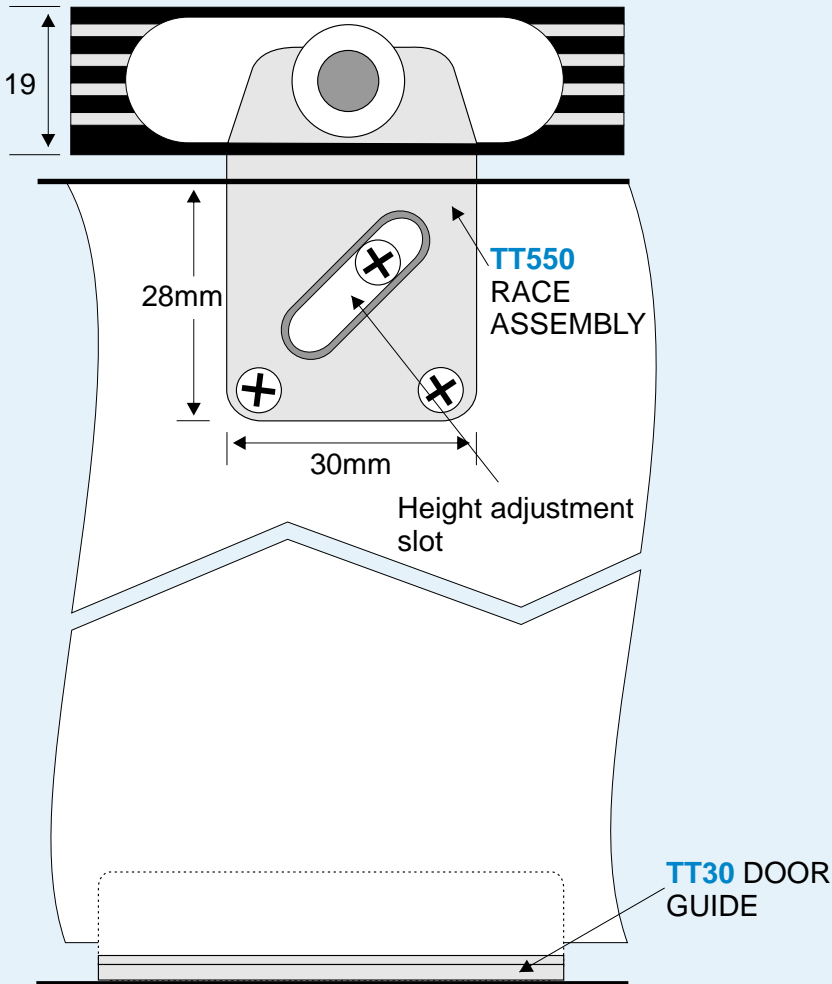

TT552 Aluminium Track



**Opening height =**

Door height + 25mm.

**Opening width =**

Door width x number of doors,  
less 30mm for each overlap

P552	Packaged Set for 2 doors - 1200 & 1800mm
P550	Components Pack for 1 door
S30	Pack of 2 TT30 Nylon Door Guides
TT552	Aluminium Single Track - 2000mm & 4500mm