

APPLICATION

- ▶ For built-in furniture, wardrobes, cupboards, etc. in residential or light commercial applications.
- ▶ By combining 'Single Top' and 'Double Top', multiple line applications can be achieved.
- ▶ On heavy use applications or where more than three doors are required, fit two only 113N/81 guides per door and 81 channel beneath each line of doors.

DOOR SPECIFICATION

Track System:	Single Top 27	Double Top 27
For Individual Doors:		
Max Door Weight	27kg	27kg
Door Thickness	16mm min	16-35mm

Lightly framed timber doors or doors made from medium density fibreboard (MDF) must have provision for hangers to be screwed securely to the back face of the doors.

STANDARD SETS AND PACKS

Sets comprise top track, hangers, door stop(s), sawcut guide(s), all screws and fitting instructions.

Single Top 27:

Set No.	Opening width	Track length	Hardware for
ST4	600mm	1200mm	1 door
ST5	750mm	1500mm	1 door
ST6	900mm	1800mm	1 door

Double Top 27:

Set No.	Opening width	Track length	Hardware for
4W	1200mm	1200mm	2 doors
5W	1500mm	1500mm	2 doors
6W	1800mm	1800mm	2 doors
8W	2400mm	2400mm	3 doors

Pack No.

Pack No.	Application
1W	1 door pack of fittings only for installing a third door on 4W, 5W or 6W sets or for use with 21 track.
2W	2 door pack of fittings for use with 20 track.
3W	3 door pack of fittings for use with 20 track.

HARDWARE SPECIFICATION

Track - Single Top 27:	21
Material	Aluminium
Standard lengths	1200mm, 1500mm, 1800mm and 4800mm

Track - Double Top 27:	20
Material	Aluminium
Standard lengths	1200mm, 1500mm, 1800mm, 2400mm, 3000mm, 3600mm and 4800mm

Hangers (2 per door): 220, 221 and 222
Nylon tyred ball race wheel with zinc plated plates face fitted to the back of the door. Vertical adjustment 10mm.

Door Stop: 28N
Nylon safety door stop prevents fingers being jammed on bi-passing doors.

Guide: 101N
Nylon sawcut guide included in sets and packs. Alternative guides available, as shown here and overleaf.

Accessories:
Finger Pull: 26
Finger pull, chrome plated brass. Push-fit into 32mm diameter by 10mm deep recess.



Guide for Single Top 27: 24/24N
Guide white nylon. Adjustable for any door thickness, no need to groove the doors.

Guide for Double Top 27: 24/25N
Guide white nylon. Adjustable for any door thickness, no need to groove the doors.


Guide for Double Top 27: 20/35
Guide nylon and zinc dichromated steel. Suitable for 20mm or 35mm thick doors allowing fine adjustment for variations in thickness and straightness of doors, no need to groove the doors.

Retractable Guide: 114RN
Guide with retractable nylon roller fitted on a steel body, zinc plated. The roller runs in a 10mm x 10mm recess grooved in floor.


Channel and Guide: 81 and 113N/81
For heavy duty applications or where more than 3 doors are required per opening. 81 channel, aluminium, available in 1200mm, 1500mm, 1800mm, 2400mm, 3000mm and 3600mm lengths. 113N/81 guides in white nylon.

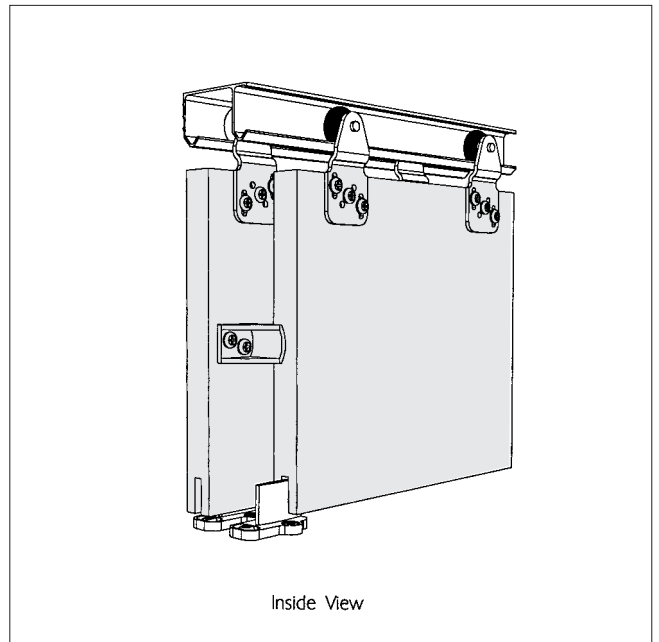


No. 220 Hanger - with white wheel




No. 221 Hanger - with coloured wheel




No. 222 Hanger - reversible, with white wheel




No. 28N Door Stop



No. 26 Finger Pull - optional




No. 101N - Guide included in sets, and packs




No. 113N/81 Guide and No. 81 Channel


ALTERNATIVE GUIDE SYSTEMS



No. 114RN Retractable Guide

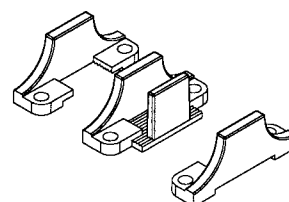

No. 24/25N Guide for Double Top 27



No. 24/24N Guide for Single Top 27


Single Top 27 & Double Top 27

FOR TOP HUNG SLIDING WARDROBE DOORS, MAX. 27kg EACH


HENDERSON®

SLIDING & FOLDING DOOR HARDWARE


AUSTRALIA'S WIDEST RANGE

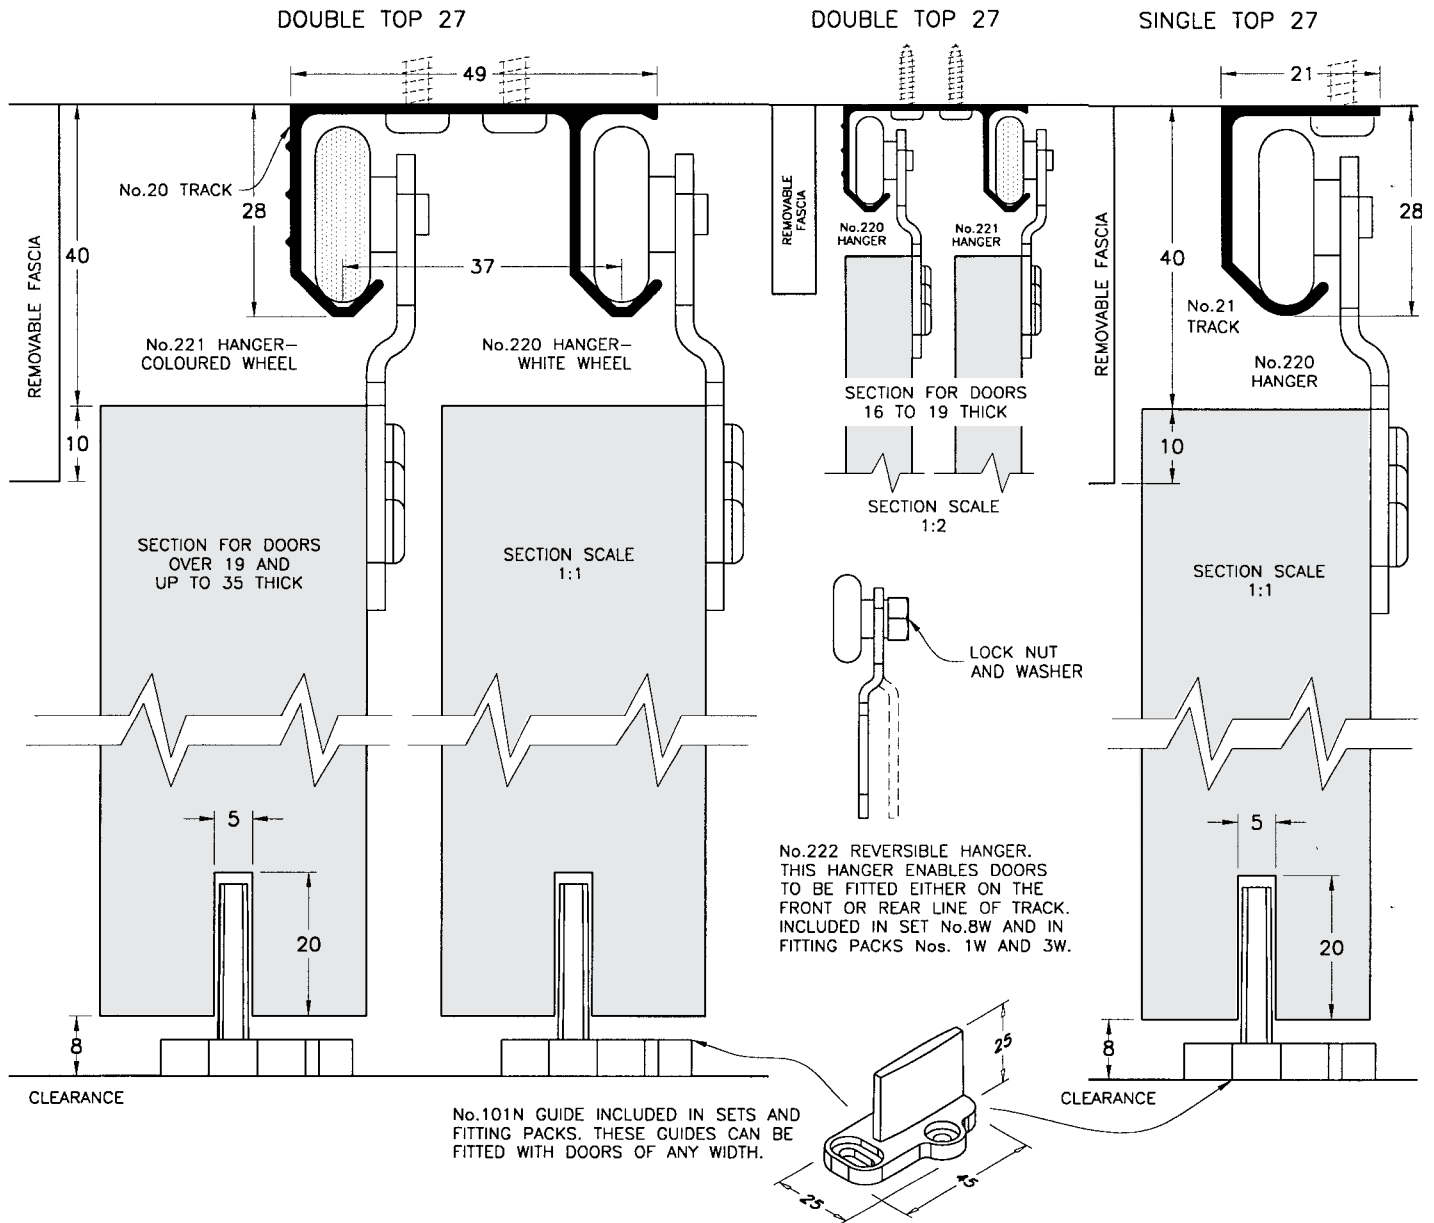


**DOUBLE TOP 27
2 DOOR APPLICATION**

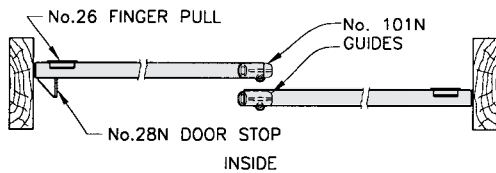


**DOUBLE TOP 27
3 DOOR APPLICATION**

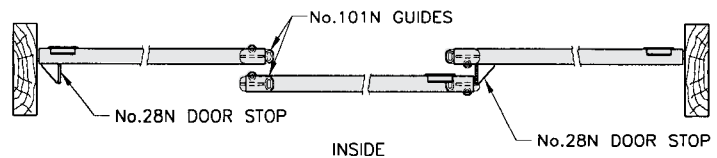

ALTERNATIVE FLOOR GUIDE FOR DOUBLE TOP 27. ESSENTIAL WHEN THERE ARE MORE THAN THREE DOORS PER OPENING

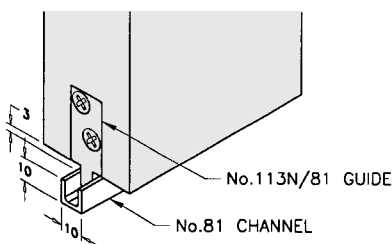


No.24/25N ALTERNATIVE GUIDE FOR DOUBLE TOP 27

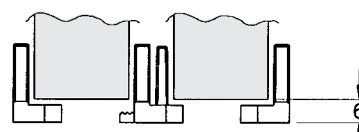

WHEN USING No.24/25N GUIDES, THE DOOR WIDTH IS THE OPENING WIDTH DIVIDED BY THE NUMBER OF DOORS PLUS 10mm.

No.24/24N ALTERNATIVE GUIDE FOR SINGLE TOP 27

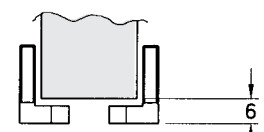

WHEN USING No.24/24N GUIDES, THE DOOR WIDTH IS HALF THE DOOR TRAVEL PLUS 10mm. THE GAP BENEATH THE DOOR CAN BE REDUCED TO 3 IF LEGS OF GUIDES ARE FITTED OUTWARDS.

HENDERSON RMD

Door Hardware Division of
RMD PRESS CO. PTY LTD.

ACN 004 313 937

© COPYRIGHT HENDERSON RMD

© HENDERSON IS A REGISTERED TRADEMARK OF PC HENDERSON LTD (UK)



B40B